

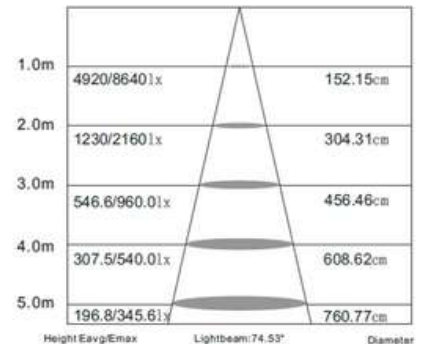


LED FLOOD LIGHT FEATURES:

- * IP65 & IK08 Led surface mounted flood light
- * Good heat elimination ability, low brightness decline
- * Die-casting aluminum housing and toughened glass diffuser
- * Various power options for different requirements
- * Anti-corrosive electrostatic black/grey powder finish
- * Working temp.: -30°C~55°C
- * Waterproof silicon sealed and AISI304 stainless steel screws
- * Color Temperature: 3000K-6500K
- * Osram/ Philips brand SMD2835/3030 SMD chip
- * IP67 HPF Isolated driver
- * Long Life span up to 30,000 hours (3 Years Warranty)

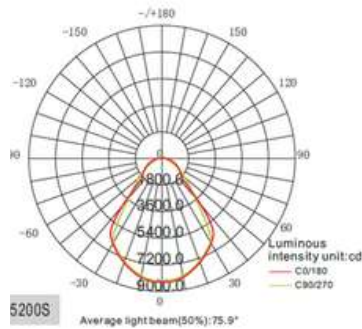

Specifications

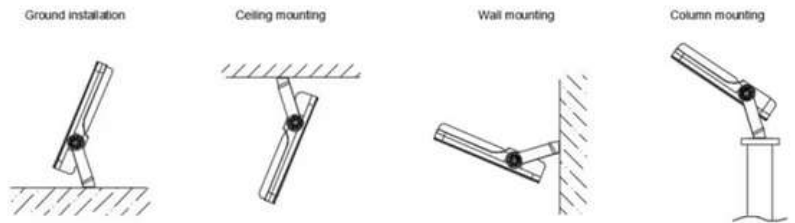

Model	Watt.	Lumen(lm)	Input Voltage	IP Rating	Light Sourcace	Size (LxWxH) (mm)
AR.FLD50	50W	5500	AC165-265V	IP66	SMD	263x 224 x 45
AR.FLD100	100W	11000	AC165-265V	IP66	SMD	315x 269 x 50
AR.FLD200	200W	22000	AC165-265V	IP66	SMD	370 x 322 x 56
AR.FLD400	400W	44000	AC165-265V	IP66	SMD	481x 408 x 60

Application: Factory, Warehouse, Parking, garage, tunnel and toll-gate, Corridor, Sheds, Indoors, Outdoor etc., etc